



#4

**PATENT APPLICATION****IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re application of

Jan Louis Josephina SERVAES, et al.

Attorney Docket No.: Q65151

Appln. No.: 09/910,037

Group Art Unit: 2817

Confirmation No.: 2356

Examiner: Not Assigned

Filed: July 23, 2001

For: LOW VOLTAGE BROADBAND LINE DRIVER

**SUBMISSION OF PRIORITY DOCUMENT**

Commissioner for Patents  
Washington, D.C. 20231

Sir:

Submitted herewith is a certified copy of the priority document on which a claim to priority was made under 35 U.S.C. § 119. The Examiner is respectfully requested to acknowledge receipt of said priority document.

Respectfully submitted,

David J. Cushing  
Registration No. 28,703

SUGHRUE, MION, ZINN,  
MACPEAK & SEAS, PLLC  
2100 Pennsylvania Avenue, N.W.  
Washington, D.C. 20037-3213  
Telephone: (202) 293-7060  
Facsimile: (202) 293-7860

Enclosures: European 00402123.4

Date: September 20, 2001

**THIS PAGE BLANK (USPTO)**



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

09/910,037  
San Louis Josephina  
Servaes

Q65151



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00402123.4

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN  
THE HAGUE, 11/07/01  
LA HAYE, LE

THIS PAGE BLANK (USPTO)



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Blatt 2 der Bescheinigung  
Sheet 2 of the certificate  
Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.:  
Demande n°: 00402123.4

Anmeldetag:  
Date of filing: 24/07/00  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
ALCATEL  
75008 Paris  
FRANCE

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:  
Low voltage broadband line driver

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

H04L25/02, H04L27/00

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:

**THIS PAGE BLANK (USPTO)**

-1-

**LOW VOLTAGE BROADBAND LINE DRIVER****Technical field of the invention**

The present invention relates to broadband line drivers, such as an ADSL  
5 (Asymmetric Digital Subscriber Line) line driver or a VDSL (Very High Speed  
Digital Subscriber Line) line driver which can be integrated on chip.

**Background of the invention**

Broadband line drivers as ADSL (Asymmetric Digital Subscriber Line) line  
10 drivers, VDSL (Very High Speed Digital Subscriber Line) line drivers or others,  
generally called xDSL line drivers (where "x" represents the type of technology),  
are known to a person skilled in the art, e.g. from Bill Schweber, "Analog front  
ends bridge the xDSL-to-real-world chasm", EDN April 1, 1999 p.48-64 (fig.3),  
from E. Nash, "Line-driver design for broadband communications applications",  
15 *Electronic Design*, December 1, 1997, p.81-94, and from M. Steffes, "Optimizing  
performance in an xDSL line driver", *Electronic Design*, April 19, 1999, Vol.47  
No.8, p.44-58.

Such broadband line drivers typically comprise a cascade connection of  
an operational amplifier and a transformer with a rather low (e.g. 1:2)  
20 transformation ratio for galvanically isolating the amplifier from the line. The  
transformation ratio has to remain low, otherwise linearity and frequency  
response are limited because a high turns ratio in transformers is more prone to  
distortion and limits the bandwidth. Moreover, in many front ends, a high step up  
for the transmitted signal (= the signal going out on the line) means a high step  
25 down for the received signal, which affects the signal to noise ratio (SNR).

Line drivers are usually back-terminated, because signals traversing an  
unterminated cable are reflected and these reflections can severely affect the  
primary signal. Conventionally, the termination resistance cannot be  
implemented with sufficient precision if a high transformation ratio is used.  
30 Indeed, to correctly terminate the line, it is necessary to set the output impedance

-2-

of the amplifier to be equal to the impedance of the line being driven. If the transformation ratio is rather high, e.g. 1:5, then the impedance reflected from the line is low, equal to the line characteristic impedance for the example given divided by 25. The low resistor values needed for the line impedance matching  
5 circuit in that case cannot be realised with sufficient resolution.

The immediate effect of back-termination is that the signal from the amplifier is halved before it is applied to the line. This doubles the power that the amplifier must deliver.

The maximum required line voltage depends on the modulation scheme  
10 used and on the line impedance and is for a low transformation ratio (1:1 or 1:2) generally between 15 and 30 V. Therefore, the operational amplifier has to generate a high voltage output signal, and thus a high power supply voltage (generally between 12 and 15 V) is required for the operational amplifier.

An active back-terminated broadband line driver is described in EP-  
15 0 901 221. The active back-termination enables to substantially decrease the power consumption of the line driver, and is widely used in industry nowadays.

However, as explained before, high power supply voltages are still needed, and a consequence thereof is that integration of the line driver on chip is not possible or at least difficult to realise. The line driver therefore, at present, is  
20 not integrated in any of the chips.

#### Summary of the invention

It is an object of the present invention to provide a broadband line driver and a method of operating the same which allows integration on a chip.

25 It is another object of the present invention to reduce the supply voltage of the amplifier of a broadband line driver.

It is yet another object of the present invention to improve non-linearities and poor frequency response of a transformer used in a broadband line driver.

These objectives may be severally or individually be accomplished by a  
30 line driver, comprising an operational amplifier and an output transformer, the



-3-

transformer being in a feedback loop between the output and the input of the operational amplifier. The driver can have a low power consumption and a low driving voltage compared with conventional designs. The non-linearities and poor frequency response of the transformer are compensated for by the feedback loop, and hence a transformer with a rather high transformation ratio (e.g. 1:5) can be used.

The present invention also provides a method of operating a broadband line driver comprising an amplifying device, comprising the steps of:

- transforming the output voltage of the amplifying device to a higher value;
- feeding back a signal from the transformed output voltage to an input of the amplifying device.

Other characteristics and advantages of the invention may be seen from the following description of a specific embodiment of a broadband line driver according to the invention; this description is given for the sake of example only, without limiting the scope of the invention. The references quoted below refer to the attached drawings.

### **Brief description of the drawings**

Fig. 1 is a schematic circuit diagram illustrating a broadband line driver with a transformer in the feedback loop in accordance with an embodiment of the present invention.

Fig. 2 is a schematic representation of an active back-terminated operational amplifier with a transformer in the feedback loop in accordance with a further embodiment of the present invention.

In the different figures, the same references refer to the same or analogous elements.

### **Description of the illustrative embodiments**

-4-

A basic circuit in accordance with an embodiment of the present invention is shown in Fig. 1 which represents, schematically, a broadband line driver having an input terminal denoted by IN, and an output terminal denoted by OUT. The input terminal IN of the basic circuit is intended to be coupled to a signal source (not represented). At the output terminal OUT appears a signal which is intended to drive a circuit or transmission line connected to the output terminal OUT.

The basic circuit is a classical feedback loop, but the amplifying element is the cascade of an operational amplifier A and a transformer T. The gain of this cascade equals K. The output signal of the amplifying cascade is divided by a factor  $\beta$  (typically between 2 and 10) and subtracted from the input signal provided by the signal source. The result of this subtraction is used as input for the amplifying cascade. The gain of the closed feedback loop, being the ratio of the output signal to the input signal provided by the signal source, equals  $\beta \cdot \frac{K}{K + \beta}$ . In practice K is much higher than  $\beta$ , such that the gain of the closed loop is in good estimation equal to  $\beta$  and insensitive to tolerances on K. The transformer T has a turn ratio 1:n ( $n > 1$ ). As a consequence the required signal range at the output of the operational amplifier A can be n times smaller than the range of the signal that is present at the output terminal OUT.

Fig. 2 illustrates a back-terminated line driver in accordance with a second embodiment of the present invention. It has a first input terminal IN1 and a second input terminal IN2 as well as a first output terminal OUT1 and a second output terminal OUT2. The input terminals IN1, IN2 are intended to be coupled to a first and a second terminal of a signal source. The output terminals OUT1 and OUT2 are intended to be coupled, via transmission lines (not represented), to a load impedance RL. More generally, the transmission line can be supposed to have a characteristic impedance ZL, the resistive part of which equals RL.

The line driver of the present embodiment comprises an amplifying device A. The amplifying device comprises a first and a second device input terminal

-5-

Al1, Al2 and a first and a second device output terminal AO1, AO2. The first device input terminal Al1 is coupled to the first input terminal IN1 of the line driver over a first resistor R11, and the second device input terminal Al2 is coupled to the second input terminal IN2 of the line driver over a second resistor R12. The device output terminals AO1 and AO2 are connected to a transforming device having a transformation ratio of 1:n whereby n is greater than or equal to 1, e.g. a transformer T. The first device output terminal AO1 is coupled to a first terminal T11 of a primary winding of the transformer T and the second device output terminal AO2 is coupled to a second terminal T12 of the primary windings thereof. A secondary winding of this transformer also has two terminals T21, T22, a first terminal T21 being coupled to the output terminal OUT1, and a second terminal T22 being coupled to OUT2. The transformer T has a turns ratio 1:n ( $n \geq 1$ ).

When using a differential output amplifier for delivering maximum power to a load, via transmission lines coupled to the differential output terminals of the amplifier, it is important to match both the impedance of the load and the output impedance of the amplifier, to the line characteristic impedance.

Therefore, the first terminal T21 and the second terminal T22 are coupled to the output terminals OUT1 and OUT2 respectively via a matching impedance, e.g. via a third and a fourth resistor R13, R14, combined with an active backtermination circuit consisting of resistors R17 and R18.

Furthermore, the first and second output terminals T21 and T22 of the transformer T are connected to the respective input Al1 and Al2 of the amplifier A via a feed back impedance. For instance, a fifth resistor R15 is coupled between the first terminal T21 of the secondary winding of the transformer T and the first device input terminal Al1. A sixth resistor R16 is coupled between the second terminal T22 of the secondary winding of the transformer T and the second device input terminal Al2. A seventh resistor R17, forming part of the just mentioned active backtermination, is coupled between the second output terminal OUT2 and the first device input terminal Al1. An eighth transistor R18,

-6-

also forming part of the just mentioned active backtermination, is coupled between the first output terminal OUT1 and the second device input terminal AI2. Hence, in accordance with this embodiment there is a feed back circuit between the output of the transformed output voltage of the amplifier A and its inputs.

- 5 Preferably, the first resistor R11 and second resistor R12 are equal and have a value R1, the third resistor R13 and fourth resistor R14 are equal and have a value  $(1-\alpha) \cdot R_L/2$  where  $\alpha$  represents the active backtermination factor, a factor which is representative for the part of the line impedance that is synthesised by use of the operational amplifier. The fifth resistor R15 and sixth  
10 resistor R16 are equal and have a value R1, and the seventh resistor R17 and eighth resistor R18 are equal and have a value  $R1/\alpha$ .

In most cases R1 will be much higher than  $R_L$ . For an  $R_L$  that can be neglected with respect to R1, the formula of the output impedance of the line driver becomes rather simple:

- 15  $Z_{out} = R_L$

- Some guideline to select appropriate values for the resistors R11, R12, R13, R14, R15, R16, R17 and R18 can be found in European Patent Application EP 0 901 221 wherein the active back termination concept is described. Anyhow, the presence of the resistors R13, R14, R15, R16, R17 and R18 makes it possible  
20 to tune the output impedance  $Z_{out}$  of the arrangement to the desired value, i.e. the value to match the load impedance  $R_L$ . The formula of the output impedance,  $Z_{out}$ , on the basis of which the different values of the resistors may be selected for the case where the respective pairs of resistors R13 and R14, R15 and R16, R17 and R18 have substantially identical values, is given by:

-7-

$$\begin{aligned}
 Z_{out} &= \frac{2.(R13.R17)}{R13+R17-R15} \\
 &= \frac{2.(1-\alpha)\frac{R_L R_1}{2\alpha}}{(1-\alpha)\frac{R_L}{2} + \frac{R_1}{\alpha} - R1} \\
 &= \frac{2.(1-\alpha).R_L.R1}{(1-\alpha).\alpha.R_L + 2.R1 - 2.\alpha.R1} \\
 &\approx \frac{2.(1-\alpha).R_L.R1}{2.R1 - 2.\alpha.R1} = \frac{2.(1-\alpha).R_L.R1}{2.(1-\alpha).R1} = R_L
 \end{aligned}$$

This means indeed that the output impedance of the line driver is matched to the characteristic impedance of the transmission lines if the resistances are chosen as mentioned herein above.

- 5 In order to obtain between the first and second output terminals OUT1, OUT2 a voltage of the required voltage level for driving the circuit connected to the transmission lines (e.g. 15 V), it can be seen that the amplifying device A can produce an output signal with a lower voltage level, if  $n$  is chosen larger than one. For example for obtaining an output voltage level of 15 V with a
- 10 transformer with transformation ratio 1:5, the output voltage produced by the amplifying device does not need to exceed 3 V. Thus thanks to a high transformation ratio, a high line driver output voltage can be generated with a low power supply voltage for the operational amplifier. Therefore, the operational amplifier can be integrated on a chip using conventional techniques.
- 15 The resistor values for active back termination become realisable with sufficient resolution. The active back termination resistive circuit is now located at the side of the transformer with most windings.

- 20 While the invention has been shown and described with reference to a preferred embodiment, it will be understood by those skilled in the art that various changes or modifications in form and detail may be made without departing from the scope and spirit of this invention.

THIS PAGE BLANK (USPTO)

-8-

**CLAIMS**

1. A broadband line driver comprising an amplifying device (A) with an input and an output, and a transforming device (T) coupled in series with the  
5 output of the amplifying device (A),

CHARACTERISED IN THAT the transforming device is located in a feedback loop that couples the output of the amplifying device (A) to the input of the amplifying device (A).

10 2. The broadband line driver according to claim 1,  
CHARACTERISED IN THAT the transforming device (T) has a transformation ratio which is higher than 1:2.

3. The broadband line driver according to claim 1 or 2,  
15 wherein a feedback circuit is connected between an output of the transforming device and the input of the amplifying device.

4. The broadband driver according to claim 3,  
wherein the feedback circuit comprises resistors.

20 5. The broadband line driver according to any of the preceding claims, comprising:

- a first input terminal (IN1) and a second input terminal (IN2) as well as a first output terminal (OUT1) and a second output terminal (OUT2);
- 25 - the amplifying device (A) having a first and a second device input terminal (AI1, AI2) and a first and a second device output terminal (AO1, AO2),
- the transforming device comprising a transformer (T) with transformation ratio  $1:n$  ( $n \geq 1$ ) and comprising a primary winding with a first terminal (T11) and a second terminal (T12) and a secondary winding with a first terminal (T21) and  
30 a second terminal (T22), the first device output terminal (AO1) being coupled to

-9-

a first terminal (T11) of the primary winding of the transformer (T), and the second device output terminal (AO2) being coupled to the second terminal (T12) of the primary winding, the first terminal (T21) of the secondary winding being coupled to the first output terminal (OUT1), and the second terminal (T22) being  
5 coupled to the second output terminal (OUT2),

- a first resistor (R17) being connected between the second output terminal (OUT2) and the first device input terminal (AI1), and a second resistor (R18) being coupled between the first output terminal (OUT1) and the second device input terminal (AI2).

10

6. The broadband driver according to claim 5,  
wherein:

- the first device input terminal (AI1) is coupled to the first input terminal (IN1) over a third resistor (R11),

15 - the second device input terminal (AI2) is coupled to the second input terminal (IN2) of the line driver over a fourth resistor (R12),

- a fifth resistor (R13) is connected between the first terminal (T12) of the secondary winding of the transformer (T) and the first output terminal (OUT1), and a sixth resistor (R14) is connected between the second terminal (T22) of the  
20 secondary winding of the transformer (T) and the second output terminal (OUT2),

- a seventh resistor (R15) is connected between the first terminal (T12) of the secondary winding of the transformer (T) and the first device input terminal (AI1) and a eighth resistor (R16) is connected between the second terminal (T22) of the secondary winding of the transformer (T) and the second device input  
25 terminal (AI2).

7. The broadband line driver according to claim 6,

CHARACTERISED IN THAT the third resistor (R11) and the fourth resistor (R12) have substantially the same resistance value.

30



-10-

8. The broadband line driver according to any of claims 6 or 7,  
CHARACTERISED IN THAT the fifth resistor (R13) and the sixth resistor  
(R14) have substantially the same resistance value.

5           9. The broadband line driver according to any of claims 6 to 8,  
CHARACTERISED IN THAT the seventh resistor (R15) and the eighth  
resistor (R16) have substantially the same resistance value.

10           10. The broadband line driver according to any of claims 5 to 9,  
CHARACTERISED IN THAT the first resistor (R17) and the second resistor  
(R18) have substantially the same resistance value.

15           11. Digital subscriber line analogue front end comprising a broadband  
line driver according to any of the previous claims.

12. A method of operating a broadband line driver comprising an  
amplifying device, comprising the steps of:

- transforming the output voltage of the amplifying device to a higher  
value;
- 20           - feeding back a signal from the transformed output voltage to an input of  
the amplifying device.

**THIS PAGE BLANK (USPTO)**

-11-

**ABSTRACT****LOW VOLTAGE BROADBAND LINE DRIVER**

- 5        The present invention relates to broadband line drivers, comprising a cascade connection of an operational amplifier (A) and a transformer (T), which can be integrated on chip. This is obtained by putting the transformer (T) in a feedback loop between the output and the input of the operational amplifier (A).

**THIS PAGE BLANK (USPTO)**

= 1/2 -

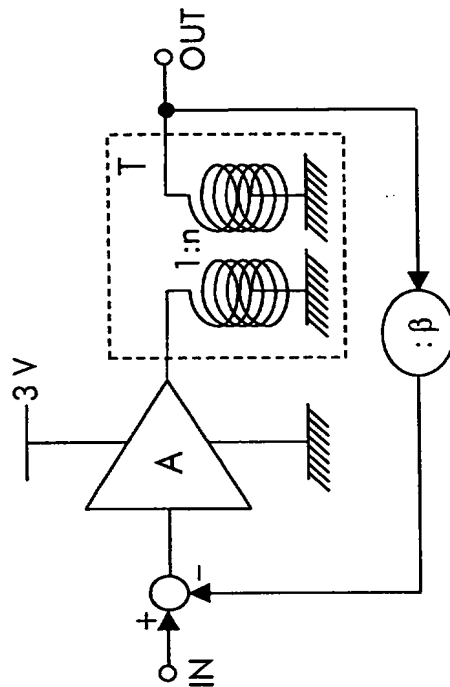


Fig. 1

- 2/2 -

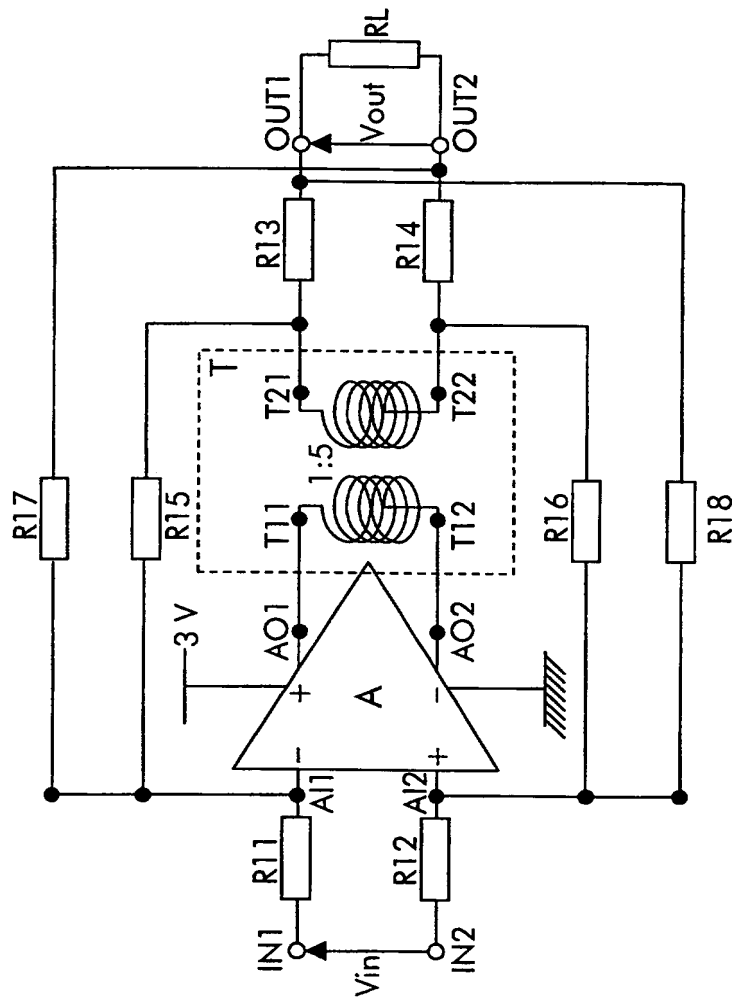


Fig. 2